
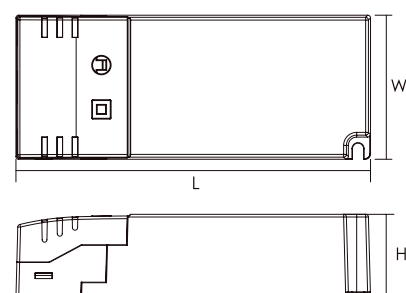


Constant Voltage TRIAC Dimming LED Driver

Features:

- Dimmable with leading edge or trailing edge dimmer
- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Smooth dimmable compatible with most dimmer
- Dimming range 1...100%

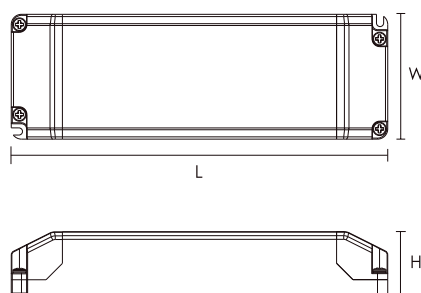

Parameters:

Model No.		Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Min. load (W)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
79332	⦿	220-240	25	24	0.1-1.04	2.4	0.95	85	<1.0	-20...+50	70	SELV	128x52x30	110
79333	⦿	220-240	50	24	0.5-2.08	12	0.95	86	<1.0	-20...+50	70	SELV	184x61x32	240
79334	⦿	220-240	100	24	1.4-4.2	33.6	0.95	91	<1.0	-20...+45	80	SELV	210x67x34	360