

SUPPLIED BY:

(UK) MANUFACTURER
ML ACCESSORIES LTD, UNIT E CHILTERN PARK,
BOSCOMBE ROAD, DUNSTABLE LU5 4LT,
WWW.MLACCESSORIES.CO.UK

(EU) AUTHORISED REPRESENTATIVE
SLV LIGHTING GROUP,
DAIMLERSTRASSE 21-23,
52531 ÜBACH-PALENBERG, GERMANY
EMAIL: EPREL@GROUP.SLV.COM

MADE IN CHINA



AVAUG23_V1



Manufacturers Declaration of Conformity
For ML Accessories (Knightsbridge)
Electrical products in accordance with UKCA marking

ML Accessories Ltd. declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

UKCA marking legislation

UK SI 2016 No. 1091	Electro Magnetic Compatibility Regulations 2016
UK SI 2016 No. 1101	The Electrical Equipment (Safety) Regulations 2016
UK SI 2012 No. 3032	Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
UK SI 2017 No. 1206	Radio Equipment regulations 2017
UK SI 2021 No. 1095	The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

Included Legislation

UK SI 2008 No. 2852	UK REACH
UK SI 2013 No. 3113	WEEE

Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website www.mlaccessories.co.uk

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The products comply with all essential requirements of the directives.

Catherine Connolly
CEO

Lee Saunders
Technical Assessment & Compliance Manager



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.



Manufacturers Declaration of Conformity
For ML Accessories (Knightsbridge)
Electrical products in accordance with CE marking

ML Accessories Ltd. Declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

CE marking legislation

In Accordance with the following Directives:

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/53/EU	Radio Equipment Directive

Including Legislation

1907/2006	REACH
2015/863	RoHS
2021/341	ERP

Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website www.mlaccessories.co.uk

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The product complies with all essential requirements of the directives.

Catherine Connolly
CEO

Lee Saunders
Technical Assessment & Compliance Manager



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.



LET'S GET
YOU SET UP

USER GUIDE



Download the SmartKnight app or the Smart Life app

On Google Play (Android™) or App Store® (Apple®). Open the app, tap "Register" and follow the on-screen instructions



Add Device

(2.4 GHz only)

To add a device tap the "+" on top right corner, select the product category and follow the on-screen instructions



Enjoy

Enjoy your connected product. For more in-depth instructions, please see section titled "Wi-Fi Control" in this leaflet



Setting up Voice Assistants

Compatible with popular voice assistants like "Amazon Alexa" and "Google Assistant".

All trademarks, logos and brand names are the property of their respective owners. All company, product and service names used are for compatibility purposes only. Use of these names, trademarks and brands does not imply their endorsement.

Visit <http://www.mlaccessories.co.uk> for further assistance

INSTALLATION & MAINTENANCE MANUAL

VFRKW

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following product: VFRKW

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician.
- Please isolate mains prior to installation or maintenance.
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation.
- Do not overload this accessory or subject it to conditions outside its rating:
 - LED dimming range 5 – 100W
 - Incandescent/halogen dimming range 10 – 200W.
 - Not suitable for fluorescent lamps.
- This product is for indoor use only.
- Please check compatibility with the intended load before installation

INSTALLATION

Note – Please note that this product is not suitable for non-dimmable luminaires.

- Always ensure the wall surface is flat and smooth.
- When using Class I accessories, all earth connections must be made and maintained. Use green/yellow sleeving on earth conductors that are not insulated.
- Check all electrical connections are secure with all exposed copper within the terminal and no loose strands of cable.
- Fit the unit into a suitable dimmer plate and wall box taking care not to compress, damage or trap any cables. If using metal mounting boxes with four lugs, remove the top and bottom lugs or bend fully back
- Connect to the mains supply ensuring the correct polarity is observed (see Fig. 1):
L1 (Lin) – Live in, L2 (P) – Push switch output, (Load) – Load Live

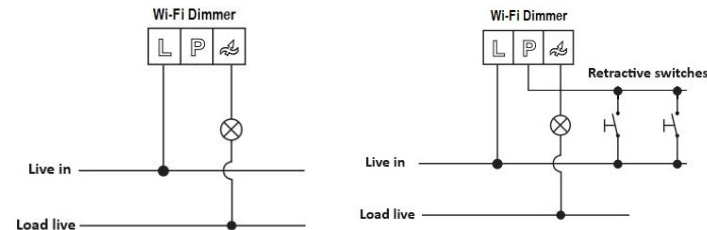


Fig. 1

- Switch on and check for correct operation.
- A small audible buzz may be emitted when using certain products. This is normal.

Wi-Fi CONTROL

We recommend enabling the Bluetooth to facilitate faster pairing. Please note that due to the limitations of Bluetooth only one product can be added at a time. If more are to be added to the app this must be done within the time the products are in pairing mode, which is approximately 2 minutes.

- Download the SmartKnight app on Google Play® or the App Store®.
- Once the app is downloaded, open the app and tap "Register" then follow the on-screen instructions.
- To add a Dimmer to the app, ensure that it is powered up and tap "+" in the top right corner.
- If the product is in pairing mode already and Bluetooth is enabled, the app will prompt to add the dimmer to the app, follow the on-screen instructions to do so.
- Tap "Dimmer Switch".
- Connect to the desired Wi-Fi network and tap "Next". Please note that only 2.4 GHz networks are supported and ensure that your device is connected to the same Wi-Fi network.
- Follow the on-screen instruction to reset the dimmer and tap "Next".
- After the dimmer has been added successfully to the app, it can be named. After naming the dimmer, tap "Done".

Note – Please note that these instructions were correct at the time of printing, for the latest version please visit our website www.mlaccessories.co.uk

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed. Please note this kind of damage will void the warranty. Ensure a mixed load is not selected, i.e. incandescent mixed with LED. It is recommended to use lamps/luminaires of the same brand and type on the same switch. Most dimmable LEDs will not have the same dimming characteristics as incandescent lamps. A small audible buzz may be emitted when using certain products, this is normal.

GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist. Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product and invalidate the warranty.

WARRANTY

This product has a warranty of 2 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google, Android and Google Play are trademarks of Google LLC.