


Data Sheet | Item Number: 788-303



Relay module; Nominal input voltage: 12 VDC; 1 changeover contact; Limiting continuous current: 16 A; Red status indicator; Module width: 15 mm; 2,50 mm²; gray




<https://www.wago.com/788-303>

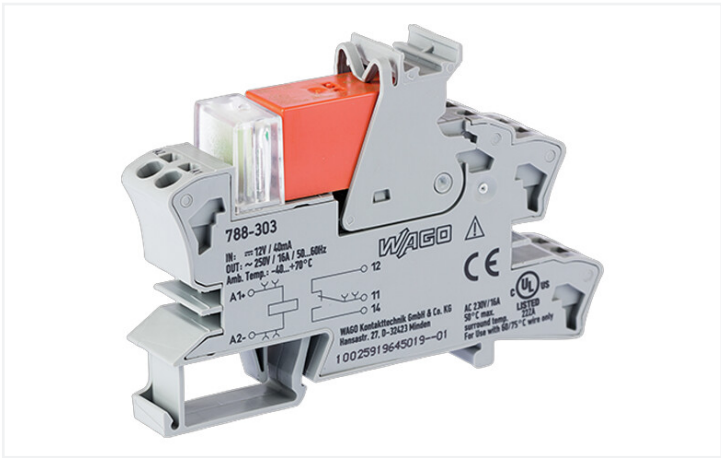


Color: ■ gray

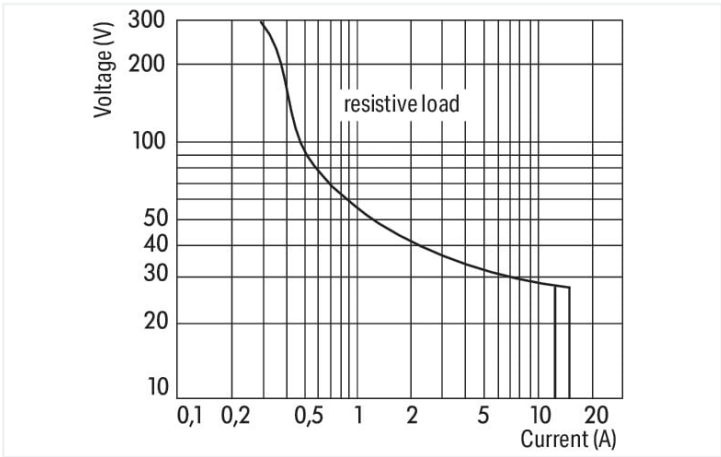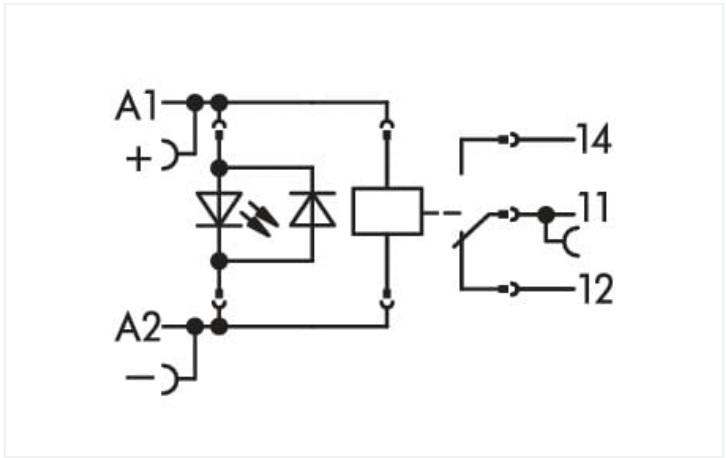

DC load limit curve

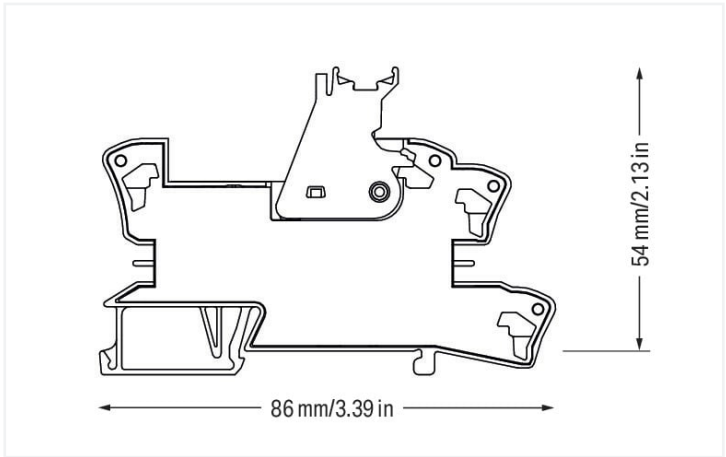

Dimensions in mm

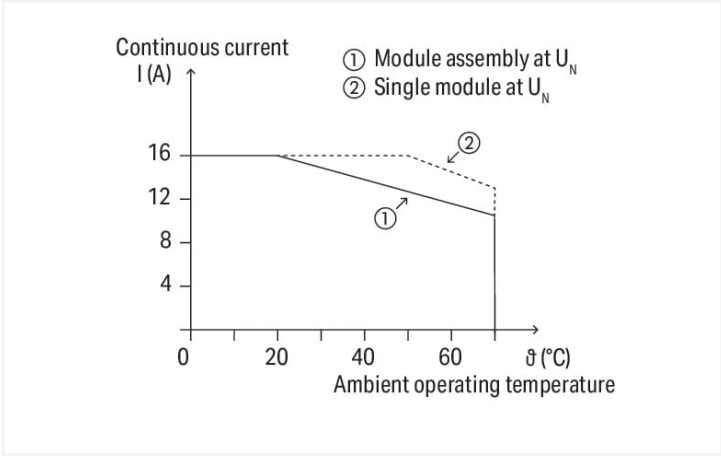

Current-carrying capacity curve



Notes	
Safety information	A separator plate (e.g., 209-191) must be used for voltages greater than 250 V between adjacent relay modules and for compliance with the reinforced insulation requirements.
Note	- Reinforced insulation between coil and contacts - To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

Technical data	
Control circuit	Load circuit
Nominal input voltage U _N	DC 12 V
Input voltage range	±10 %
Nominal input current at U _N	36 mA
	Number of changeover/switchover contacts
	1
	Contact material (relay)
	AgNi 90/10
	Limiting continuous current
	16 A
	Inrush current (resistive) max.
	(AC) 30 A / 4 s
	Switching voltage (max.)
	AC 250 V
	Switching power (resistive) max.
	AC 4000 VA; DC (see load limit curve)
	Switching capacity
	AC-15: 6 A / AC 250 V; DC-13: 2 A / DC 24 V
	Recommended minimum load
	12 V / 10 mA
	Pull-in time (typ.)
	8 ms
	Drop-out time (typ.)
	6 ms
	Bounce time (typ.)
	6 ms
	Electrical life (NO; resistive load; 23 °C)
	30 x 10 ³ switching operations
	Mechanical life
	30 x 10 ⁶ switching operations
	Switching frequency with/without load (max.)
	6 min ⁻¹ / 1200 min ⁻¹

Signaling	
Status indicator	Red LED

Safety and protection	
Rated voltage	250 V
Rated surge voltage	4 kV
Pollution degree	3
Dielectric strength (control/load circuit) (AC, 1 min)	5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Safety information	A separator plate (e.g., 209-191) must be used for voltages greater than 250 V between adjacent relay modules and for compliance with the reinforced insulation requirements.
Protection type	IP20

Connection data	
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches



Physical data		
Width		15 mm / 0.591 inches
Height		86 mm / 3.386 inches
Depth from upper-edge of DIN-rail		54 mm / 2.126 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Color		gray
Fire load		0.677 MJ
Weight		45.9 g

Environmental requirements		
Ambient temperature (operation at U _N)		-40 ... +70 °C
Ambient temperature UL (operation at U _N)		-40 ... +50 °C
Ambient temperature (storage)		-40 ... +70 °C
Processing temperature		-25 ... +50 °C
Temperature range of connection cable		≥ (T _{ambient} + 20 K)

Standards and specifications		
Standards/specifications		EN 61010-2-201 EN 61810-1 EN 61373 UL 508 (max. 10 A)

Basic relay		
WAGO Basic Relay		788-150

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-37-16-01
eCl@ss 9.0		27-37-16-01
ETIM 8.0		EC001437
ETIM 7.0		EC001437
PU (SPU)		20 (1) pcs
Packaging type		Box
Country of origin		CN
GTIN		4055143184106
Customs tariff number		85364900990


Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011	EAC RU C-DE.AM02. B.00122/19	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 508	E175199 Vol.1 Sec.6	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking using WMB Multi markers and group marker carriers.